
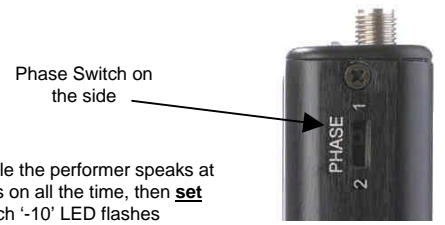


# Micron 700 Series – TX700 – POCKET TRANSMITTER - Quick User Guide

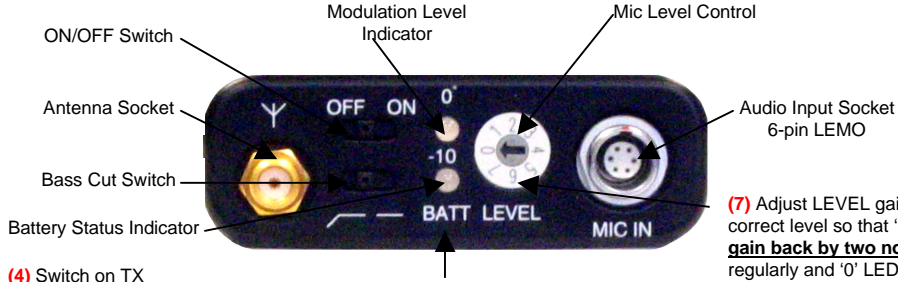

(4) Switch on TX (by connecting microphone cable to 6-pin LEMO socket and ON/OFF switch to 'ON' position)

(5) Check TX battery status LED, if RED replace battery with a new one

(7) Adjust LEVEL gain control, while the performer speaks at correct level so that '0' LED comes on all the time, then set gain back by two notches at which '-10' LED flashes regularly and '0' LED flashes occasionally.



### Setting Up Procedure:

(1) Connect provided TX antenna (Screw-on SMA antenna)

(3) Set your TX frequency same as RX  
**please note: to change frequency turn unit on/off**

(6) Check RX Signal Strength Indicator – all LEDs should be lit.

(8) NOW YOUR SYSTEM IS READY TO USE.

(2) Fit a PP3 9V battery, check TX battery status LED  
**Please watch polarity of battery.**

The battery compartment is opened by pressing the button on the back of the unit. There is a slot for the 9V battery to fit into.

The battery can easily be released with the aid of the thumb.

Battery Life approx. 6 hours

